


Insulating tarpaulin Standard

STANDARD 250 GR/M²

Insulation tarpaulins with foam provide excellent thermal protection for curing concrete. These specialized tarps create an insulating layer that helps maintain a consistent temperature, allowing the concrete to cure evenly and enhancing its quality and durability.

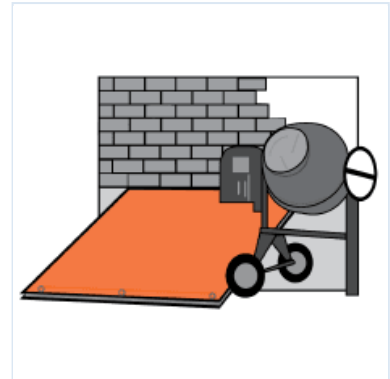

Technical data

- Thermal resistance: 0.13 m² K/W
- 3-layer construction of 2 PE tarpaulins, with an insulating middle layer of foam (4 mm)
- One side silver, the other side orange
- Product double-stitched all round with thread and yarn, with an aluminium eyelet in each corner (4 in total), inner 12mm
- Each insulation tarpaulin packed in a transparent PE bag with a neutral Cover insert sheet, 4 languages and EAN code
- Outer packaging in woven PE fabric with a neutral COVER sticker
- Delivered on block pallets (100×120cm)
- Pallet height approx. 210cm

Customisation

- Custom size: quantity and delivery time by arrangement
- Custom colour and/or weight: quantity and delivery time by arrangement
- Private label / own brand or neutral label possible

Sizes

Cut size (m)	 Orange	Foam thickness	Quantity per pallet
4 × 6	✓	4 mm	28
6 × 8	✓	4 mm	18
8 × 10	✓	4 mm	8

CONTINUED

Cut size (m)	 Orange	Foam thickness	Quantity per pallet
10 × 12	✓	4 mm	8