


PE leno tarp FR

STANDARD 180 GR/M²

Flame-retardant reinforced scaffold wrap is engineered to mitigate wind load while offering fire-resistant properties on construction scaffolding. It serves as a protective shield against strong winds, ensuring scaffold stability and safeguarding workers and materials. With its ability to withstand fire, it enhances safety measures on-site, making it indispensable for construction projects where fire safety is paramount.

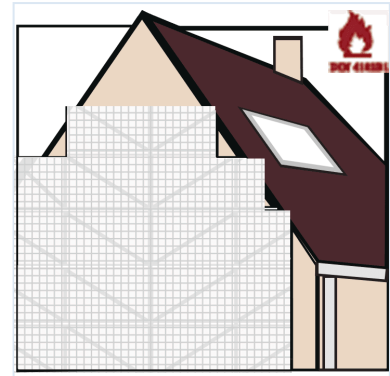

Technical data

Tensile strength	491N / 5cm (ISO 13937-1)
Tear strength	93N / 5cm (ISO 13937-1)
Temperature resistance	-40°C / +80°C

Product information

- HDPE leno-weave fabric with transparent LDPE coating on both sides
- 2% UV-stabilised
- Product flame-retardant (NVO); corresponding DIN4102-B1 certificate available
- PE fabric mounting strips welded lengthwise with pre-punched eyelets every 10cm, inner Ø 15mm (one side double)
- Individually packed in a transparent PE bag with a neutral COVER sticker, 4 languages and EAN code
- Outer packaging in bales of scaffold sheeting
- Delivered on Euro pallets (80×120cm)
- Pallet height approx. 115cm

Customisation

- Custom size, colour and/or weight: minimum order and delivery time by arrangement
- Private label / own brand packed in box or bale
- This product can be printed
- Optional: CORONA surface treatment gives printed texts more durable adhesion

Sizes

Finished size (m)	 White NVO	Mounting strap spacing (cm)	Quantity per bale	Quantity per pallet
1.70 × 20	✓	14 + 7 + 7	4	60
2.20 × 20	✓	14 + 7 + 7	3	45
2.70 × 20	✓	14 + 7 + 7 + 7	2	36
3.20 × 20	✓	14 + 7 + 7 + 7	2	30