


PE debris net FR

STANDARD 60 GR/M²

Flame-retardant scaffold nets are essential for safety at construction sites and events. Meeting strict standards, they minimize fire risk and damage, making them a vital investment for a secure work environment.

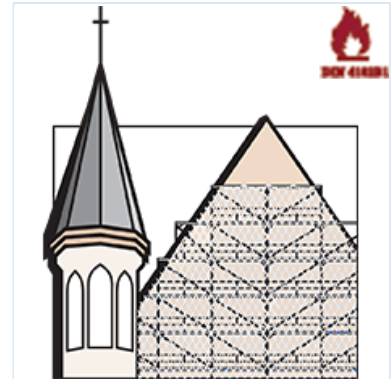

Technical data

Tensile strength	264N / 5cm (ISO 13937-1)
Tear strength	56N / 5cm (ISO 13937-1)
UV resistance	300 kLy
Temperature resistance	-40°C / +80°C

Product information

- HDPE monofilament knitted net
- 3% UV-stabilised
- Eyelet tape along both long sides (single) and in the middle (double) with buttonholes every 3cm, Ø 12mm
- Each scaffold net folded once and rolled up, packed in a transparent PE bag with a neutral COVER sticker, 4 languages and EAN code
- Delivered on block pallets (100 × 120cm)
- Pallet height approx. 210cm

Customisation

- Custom size, colour and/or weight: minimum order and delivery time by arrangement
- Private label / own brand packed on a roll
- This product cannot be printed

Sizes

Size (m)	White NVO	Rolls per pallet
2.57 × 100	✓	25
3.07 × 100	✓	25