


PE wind reduction net 90% FR

EXTRA 120 G/M²

Flame-retardant wind reduction nets for scaffolding provide an effective solution to mitigate the impact of strong winds on construction sites. With a remarkable 90% wind reduction capability, these nets significantly reduce the force exerted by winds on scaffolding structures, thereby enhancing overall safety.

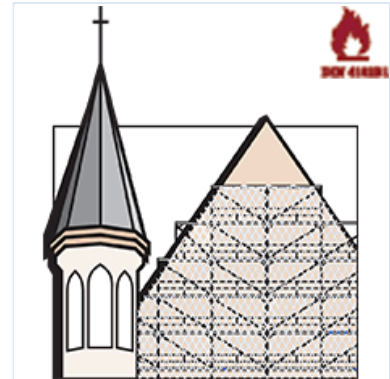

Technical data

Tensile strength	1192N / 5cm (ISO 13937-1)
Tear strength	341N / 5cm (ISO 13937-1)
UV resistance	400 kLy
Temperature resistance	-40°C / +80°C

Product information

- HDPE finely woven fabric
- 4% UV-stabilised
- Reinforcement tape along both long sides and in the middle, with 5cm mounting loops every 25cm (one side double)
- Red tape with woven-in text: DIN4102-B1
- Each scaffold net folded once and rolled up, packed in a transparent PE bag with a neutral COVER sticker, 4 languages and EAN code
- Flame-retardant (NVO); corresponding DIN4102-B1 certificate available
- Delivered on block pallets (100×120cm)
- Pallet height approx. 210cm

Customisation

- Custom size, colour and/or weight: minimum order and delivery time by arrangement
- Private label / own brand packed on a roll
- This product cannot be printed

Sizes

Size (m)	 White NVO	Rolls per pallet
2.07 × 50	✓	35
2.57 × 50	✓	35
3.07 × 50	✓	35