


PVC tarpaulin Standard

STANDARD 600 GR/M²

PVC tarpaulins, extra heavyweight and durable, find applications in camping, construction, roofing, agriculture, freight transport, events, vehicle protection, and industrial settings. Versatile and weather-resistant, they offer reliable protection in diverse environments.

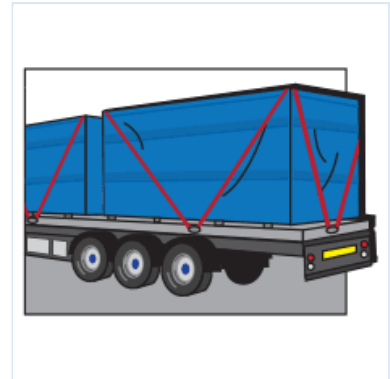

■ Technical data

Tensile strength	2400N / 5cm (DIN 53352)
Tear strength	300N / 5cm (DIN 53363)
Temperature resistance	-30°C / +70°C

■ Product information

- Polyester fabric with PVC coating on both sides
- 5% UV-stabilised
- Welded hem all round with a brass eyelet every metre, inner Ø 18mm
- Each tarpaulin packed in a transparent PE bag with a neutral COVER insert sheet, 4 languages and EAN code
- Outer packaging in bales
- Delivered on Euro pallets (80×120cm)
- Pallet height approx. 210cm

■ Customisation

- Custom size in small quantities: delivery time 3-4 months
- Custom colour and/or weight: minimum order approx. 10,000m², delivery time from 3-4 months
- Private label / own brand packed in bales
- This product can be printed

Sizes

Cut size (m)	 Green	 Blue	Quantity per bale	Quantity per pallet
2 × 3	✓	✓	1	96
3 × 4	✓	✓	1	48
4 × 4		✓	1	40
4 × 6	✓	✓	1	24
5 × 6	✓	✓	1	16
6 × 8	✓	✓	1	12
6 × 10	✓	✓	1	8
8 × 10	✓	✓	1	8
10 × 12	✓	✓	1	4